


SPECIFICATION SHEET

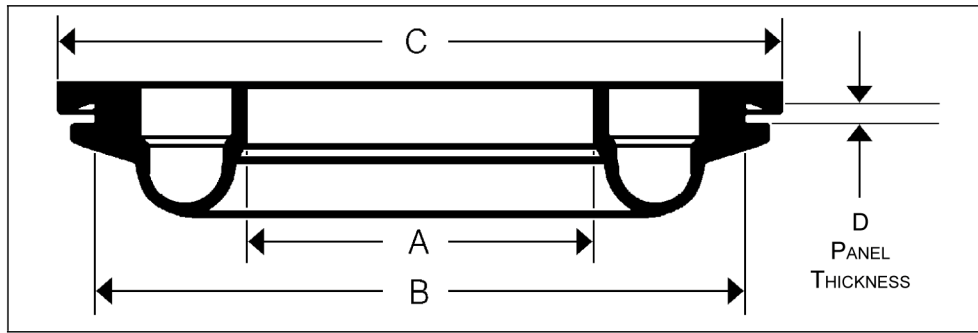

PART NUMBER	TUBE O.D.	PIPE I.P.S.	PIPE COUPLING	ELECTRICAL CONDUIT	A INSIDE DIAMETER	A RANGE OF DIAMETER	B PANEL HOLE	C INSTALLED O.D.	D THICKNESS RANGE
250	1/4				0.225	0.250 - 0.265	7/8	1-3/16	.050 - .125
375	3/8	1/8			0.350	0.375 - 0.405	1-1/16	1-3/8	.050 - .125
375-C	3/8	1/8			0.360	0.375 - 0.400	1-1/4	1-9/16	.030 - .075
500	1/2	1/4			0.475	0.500 - 0.559	1-1/4	1-9/16	.050 - .125
560	5/8		1/8	3/8	0.560	0.580 - 0.634	1-1/4	1-9/16	.050 - .125
635		3/8	1/4	1/2	0.604	0.635 - 0.719	1-3/8	1-11/16	.050 - .125
720	3/4				0.685	0.720 - 0.824	1-1/2	1-13/16	.050 - .125
825	7/8	1/2	3/8		0.775	0.825 - 0.919	1-5/8	2	.050 - .125
920	1			3/4	0.860	0.920 - 1.019	1-3/4	2-1/8	.050 - .125
1020		3/4	1/2		0.970	1.020 - 1.109	2	2-7/16	.050 - .125
1020-T	7/8	1/2	3/8		0.775	0.825 - 0.919	2	2-7/16	.050 - .125
1110	1-1/8			1	1.050	1.110 - 1.199	2-1/8	2-5/8	.050 - .125
1300	1-3/8	1	3/4		1.235	1.300 - 1.399	2-3/8	2-7/8	.050 - .125
1500			1	1-1/4	1.422	1.500 - 1.624	2-1/2	3	.050 - .125
1625	1-5/8	1-1/4		1-1/2	1.520	1.625 - 1.750	2-5/8	3-1/8	.050 - .125
1875		1-1/2	1-1/4		1.755	1.875 - 2.000	2-7/8	3-3/8	.050 - .125
2000	2-1/8		1-1/4X		1.870	2.000 - 2.125	3	3-1/2	.050 - .125
2125			1-1/2	2	1.985	2.125 - 2.250	3-1/8	3-5/8	.050 - .125
2250		2	1-1/2X		2.100	2.250 - 2.375	3-1/4	3-3/4	.050 - .125
2375		2			2.220	2.375 - 2.500	3-1/2	4	.050 - .125
2500	2-5/8				2.340	2.500 - 2.625	3-5/8	4-1/8	.050 - .125
2625			2		2.470	2.625 - 2.750	3-3/4	4-1/4	.050 - .125
2875		2-1/2	2X		2.695	2.875 - 3.000	4	4-1/2	.050 - .125
3125	3-1/8		2-1/2		2.895	3.125 - 3.250	4-1/4	4-3/4	.050 - .125
3375		3	2-1/2X		3.250	3.375 - 3.500	4-7/8	5-3/8	.050 - .125
3625	3-5/8				3.375	3.625 - 3.750	4-7/8	5-3/8	.050 - .125
4000	4-1/8	3-1/2	3		3.750	4.000 - 4.125	5-3/4	6-1/4	.050 - .185
4500		4	3X		4.250	4.500 - 4.625	6-1/4	6-3/4	.050 - .185

- SHORE A DUROMETER OF 60
- TEMPERATURE RANGE OF -40°F TO +200°F (+250°F INTERMITTENT)
- RESISTS OILS, MOST CHEMICALS AND ACIDS

- SEALS OF AIR, DIRT, ODORS AND MOISTURE
- DOES NOT TRANSMIT VIBRATION
- REMAINS FLEXIBLE, NO HARDENING OR CRACKING
- SNAPS EASILY INTO PLACE