

## ELISE S2 ADJUSTABLE REAR WING FITTING GUIDE

### R01SB0095



#### INTRODUCTION

The ReVerie Lotus S2 adjustable rear wing has been specifically designed for fitment to the Lotus Elise S2, the wings profile is the work of a professional aerodynamicist active in the leading edge of motorsport whose target was to develop a rear wing offering improved down force, minimal drag whilst aesthetically complementing the form of the Elise S2.

The wing is hollow in section and constructed from fully autoclaved pre-preg Carbon Fibre. The Carbon/Aluminium wing support posts have been developed to allow adjustment to the wings angle of attack for increased rear end down force and potential aero balancing when required.

**WARNING, MOTORSPORT OR DRIVING CAN BE DANGEROUS RESULTING IN DEATH OR PERSONAL INJURY.**

**READ OUR FITTING INSTRUCTIONS CAREFULLY**

This article is sold without warranty expressed or implied. No warranty or representation is made as to this product's ability to protect the user from injury or death. The user assumes that risk. The effectiveness, warranty and longevity of this equipment are directly related to the manner in which it is INSTALLED, USED, and/or MAINTAINED. THE USER ASSUMES THE RISK.

FITMENT OF REVERIE PRODUCTS TO AUTOMOBILES THAT ARE SUBJECT TO A MANUFACTURER'S WARRANTY MAY VOID THE MANUFACTURER'S WARRANTY AND THE VEHICLES ABILITY TO MEET EMISSION OR OTHER TRANSPORT REGULATIONS.

By purchasing this product and opening the packaging, purchasers expressly acknowledge, understand and agree that they take, select and purchase these REVERIE products from REVERIE, its affiliates, distributors, and agents ( collectively, REVERIE) "as is" and "with all faults".

The entire risk as to the quality and performance of these REVERIE parts is with the purchasers. Should the goods prove defective following their purchase; the purchasers assume the entire cost for all necessary servicing or repair or any resulting liability. Working on your car can be a dangerous activity. If you are unsure of what you are doing, please leave mechanical or Safety critical work to a skilled mechanic.

We take no responsibility for the incorrect use and / or installation of REVERIE products.

[WWW.REVERIE.LTD.UK](http://WWW.REVERIE.LTD.UK)

## UV-PROTECTION

Please Note Epoxy Pre-preg products are not UV stable. Texallium products are particularly liable and can yellow in only 2 – 6 weeks. The epoxy resin will 'yellow' with prolonged exposure to UV radiation and material strength properties will slowly deteriorate. We recommend exterior products or those exposed to constant UV are either colour painted or at least Lacquered. We use predominately 2K car lacquers of medium solids, the DBS range has been found very suitable, although people have had equally good results with Urethanes varnishes and epoxy clear coats.

The surface should be sanded with 180, 240 then 320 grit and a cleaning solvent used to remove grease or dirt prior to paint application. Several coats may be required (normally 3 to 4 light coats) to avoid pin-holing, common with painting composite products. Pin holes may be dubbed in carefully with a brush, then wet flatted for a final application of 3 thin coats. **Let air dry only**, you may stove the paint at 70'c once fully air dried.

## ELISE S2 ADJUSTABLE REAR WING KIT CONTENTS

- 1 X CARBON REAR WING
- 4 X M5 MALE ROSE JOINTS
- 2 X CARBON/ALU POSTS LONG
- 2 X CARBON/ALU POSTS SHORT
- 2 X CARBON/ALU FEET
- 2 X CAST ALUMINIUM PRESSURE PADS
- 4 X BOLTS M6 X 50mm
- 4 X WASHERS PENNY M6
- 4 X BOLTS M5 X 20mm
- 4 X NUTS STD M5
- 4 X NUTS NYLOCK M5
- 8 X WASHERS SMALL M5



## FITTING INSTRUCTIONS

A



TAPE IN PLACE ON THE REAR CLAM THE PROVIDED DRILLING TEMPLATE

B




WITH A SMALL DRILL BIT (2-4mm IS IDEAL) PILOT DRILL THE FOUR MOUNTING HOLES INDICATED ON THE TEMPLATE, THEN REMOVE THE TEMPLATE AND DRILL THE HOLES OUT TO 10mm


C



PLACE A M6X50mm BOLT AND M6 PENNY WASHER INTO THE REAR HOLE OF THE ALUMINIUM PRESSURE PAD (LH SHOWN, REPEAT FOR RH)

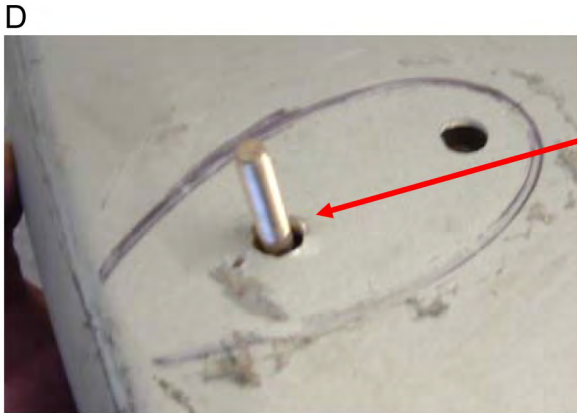

POSITION THE PRESSURE PAD INSIDE THE REAR CLAM WITH THE M6 BOLT PROTRUDING THROUGH THE REAR MOST HOLE

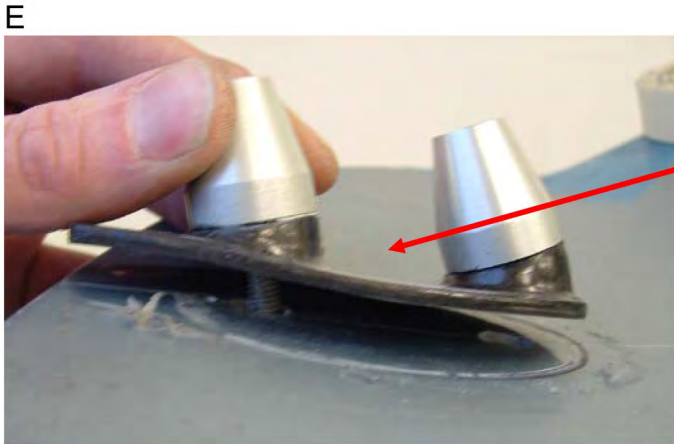

PLACE THE CARBON/ALU FOOT ON TO THE CLAM AND TIGHTEN BY HAND THE M6 BOLT INTO THE FOOT



INSERT A BOLT IN TO THE FRONT THREAD, AND TIGHTEN ALL BOLTS (LH SHOWN REPEAT FOR RH)



G




THREAD AN M5 STD NUT ONTO THE ROSE JOINT, THEN THREAD THE ROSE JOINT INTO THE CONICAL END OF THE CARBON/ALU POST AS FAR AS YOU CAN (REPEAT FOR ALL POSTS)

H



THREAD THE SHORT POST COMPLETELY ONTO THE M6 BOLT THAT PROTRUDES THROUGH THE REAR OF THE FOOT, THEN DO THE SAME WITH THE LONG POST AT THE FRONT OF THE FOOT (LH SHOWN REPEAT FOR RH)


I

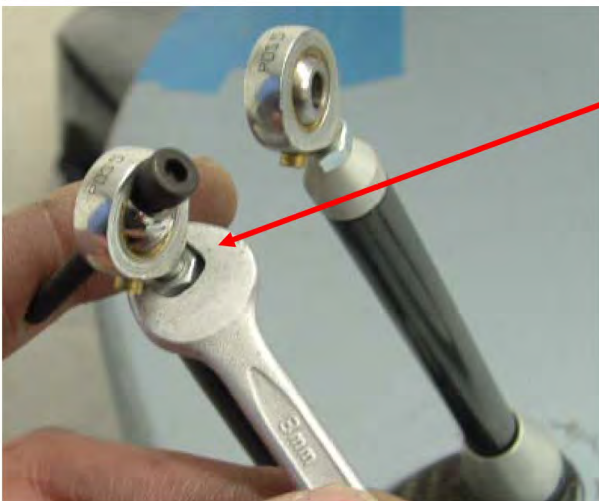

WHILST HOLDING THE POST SLACKEN OFF THE M5 ROSE JOINT AND BOLT, AND ALIGN THE ROSE JOINT LONGITUDINALLY. THEN FROM THIS POINT UNWIND THE ROSE JOINT 6 FULL TURNS AND LOCK THE NUT DOWN TO THE POST (REPEAT OR ALL POSTS)



J

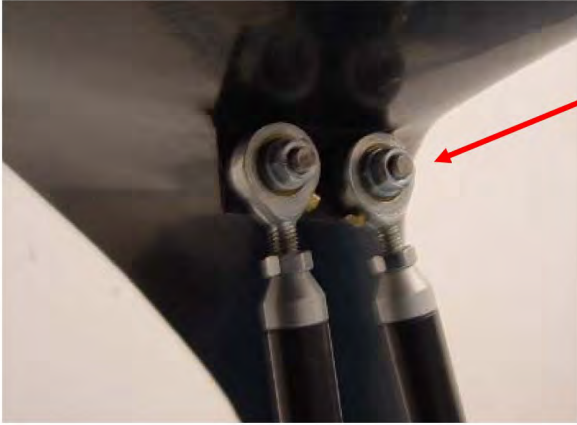

YOU CAN NOW SIMPLY ATTACH THE WING TO THE POSTS WITH THE PROVIDED M5 BOLTS, WASHERS AND NYLOCK NUTS

K



WITH THE VEHICLE ON A FLAT SURFACE AND THE RIDE HEIGHT EQUAL ALL-ROUND, THE WING WILL HAVE AN ANGLE OF ATTACK OF APPROXIMATELY 8.5° (MEASURED OF THE WING'S TOP SURFACE)

L

THE WING'S ANGLE OF ATTACK CAN SIMPLY BE ALTERED BY WINDING THE REAR ROSE JOINT IN OR OUT. A HALF TURN OF THE REAR ROSE JOINT IS APPROXIMATELY EQUAL TO 1° CHANGE IN THE WINGS ANGLE OF ATTACK